1. 3
2. 7.ǎ 5
3. 7
4. 7
5. 8
6. DMX 10
7. DMX 11
8. DMX

.....

CE认证标志

1.

1.1

GB 43472-

2. ǎ

ǎ

- ا 220V~ 50Hz
- 1.3A
- w 290W PF>0.9

ǎ

- LED مم 7 25W w RGBW 4 1 LED ~شخ
- LED ث 50,000H LED


- ~شخ RGBW غ
- ~ 2700K, 3200K, 4300K, 5600K, 6500K, 8000K
- ~ ثم └ ٧

- 4 5/8/16/21 DMX
- 2 └ DMX512 ~ └/
- 12 -59 أ
- ~ 1-25 /
- 0%-100% ~ └ 4 أ. غ


-
- 15 U ا 3 U~

- 7 ~
- ا DMX ا
- ~ DMX ضخي كح w
- أ
- RDM w
- ~ ا ~

- 6.8 kg

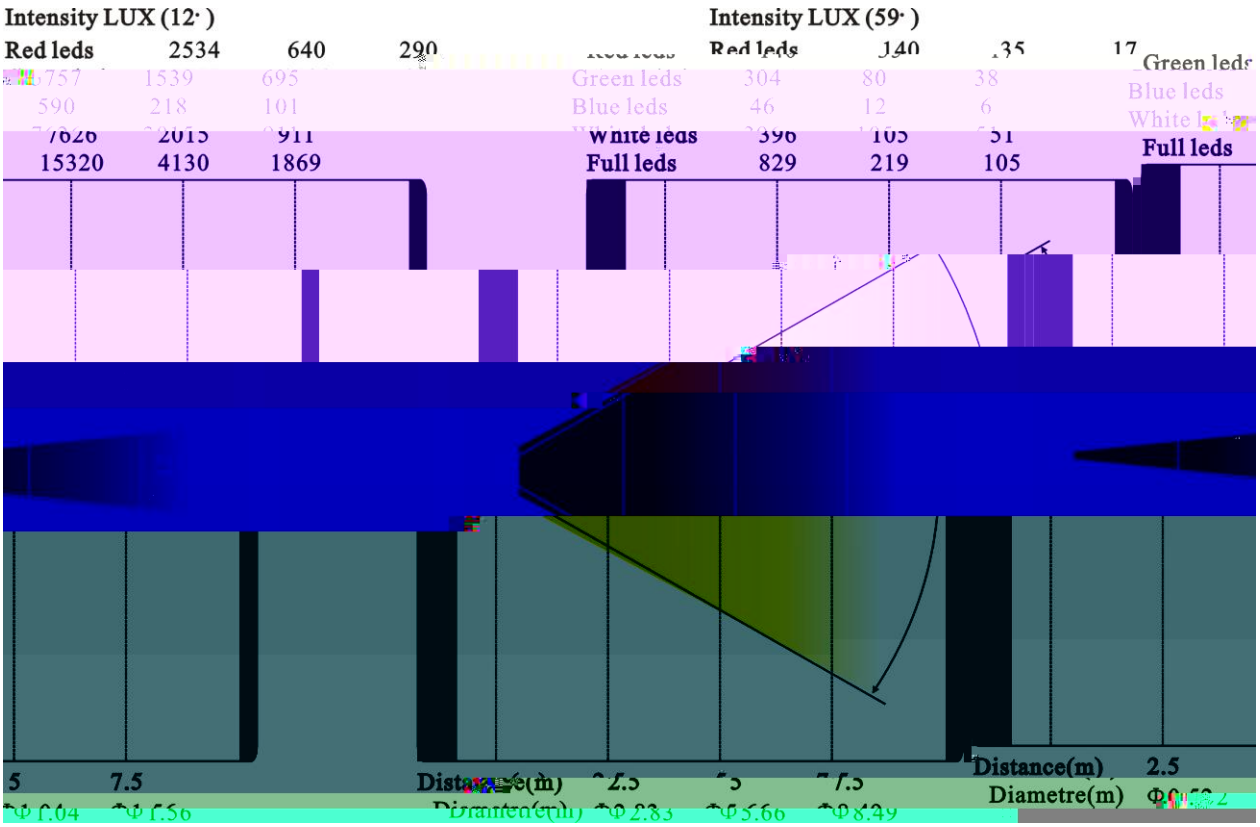

Intensity LUX (12°)
Red leds 2534 640 290
757 1539 695
590 218 101
7826 2015 911
15320 4130 1869
Intensity LUX (59°)
Red leds 140 35 17
Green leds 304 80 38
Blue leds 46 12 6
White leds 396 105 51
Full leds 829 219 105
Green leds
Blue leds
White leds
Full leds
5 7.5
Distance(m) 2.5 5 7.5
Diametre(m) Φ1.04 Φ1.56 Φ2.83 Φ5.66 Φ8.49
Distance(m) 2.5
Diametre(m) Φ5.62

3.

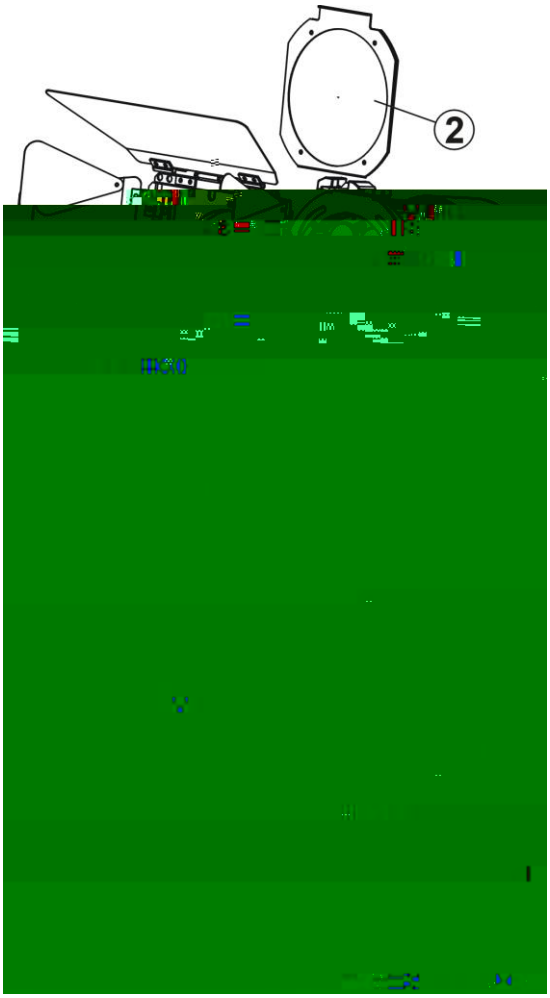


1) ضر
2) .
3) ضم
4) ~
5) ~
6) o
7) / -
8)
9) h -
10) h -
11) -
12)
13)

4. ج يد

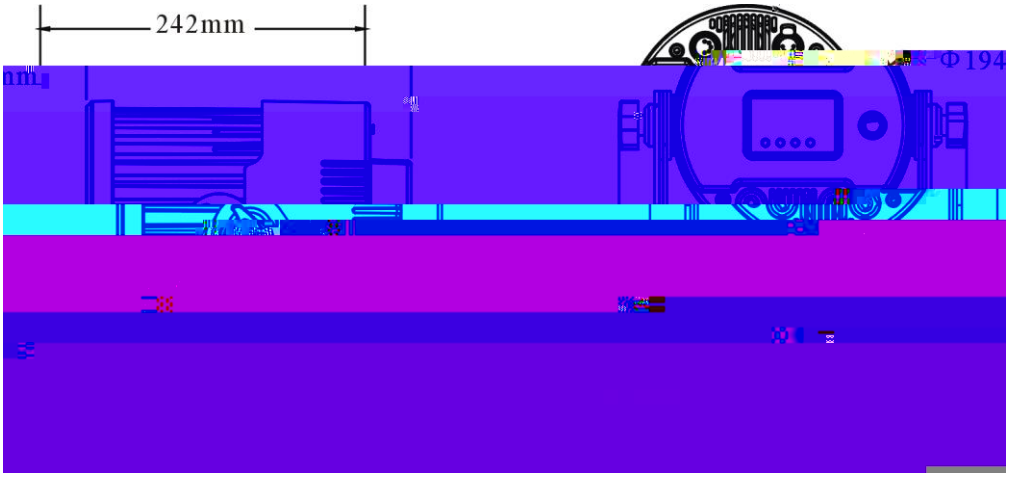

5.3

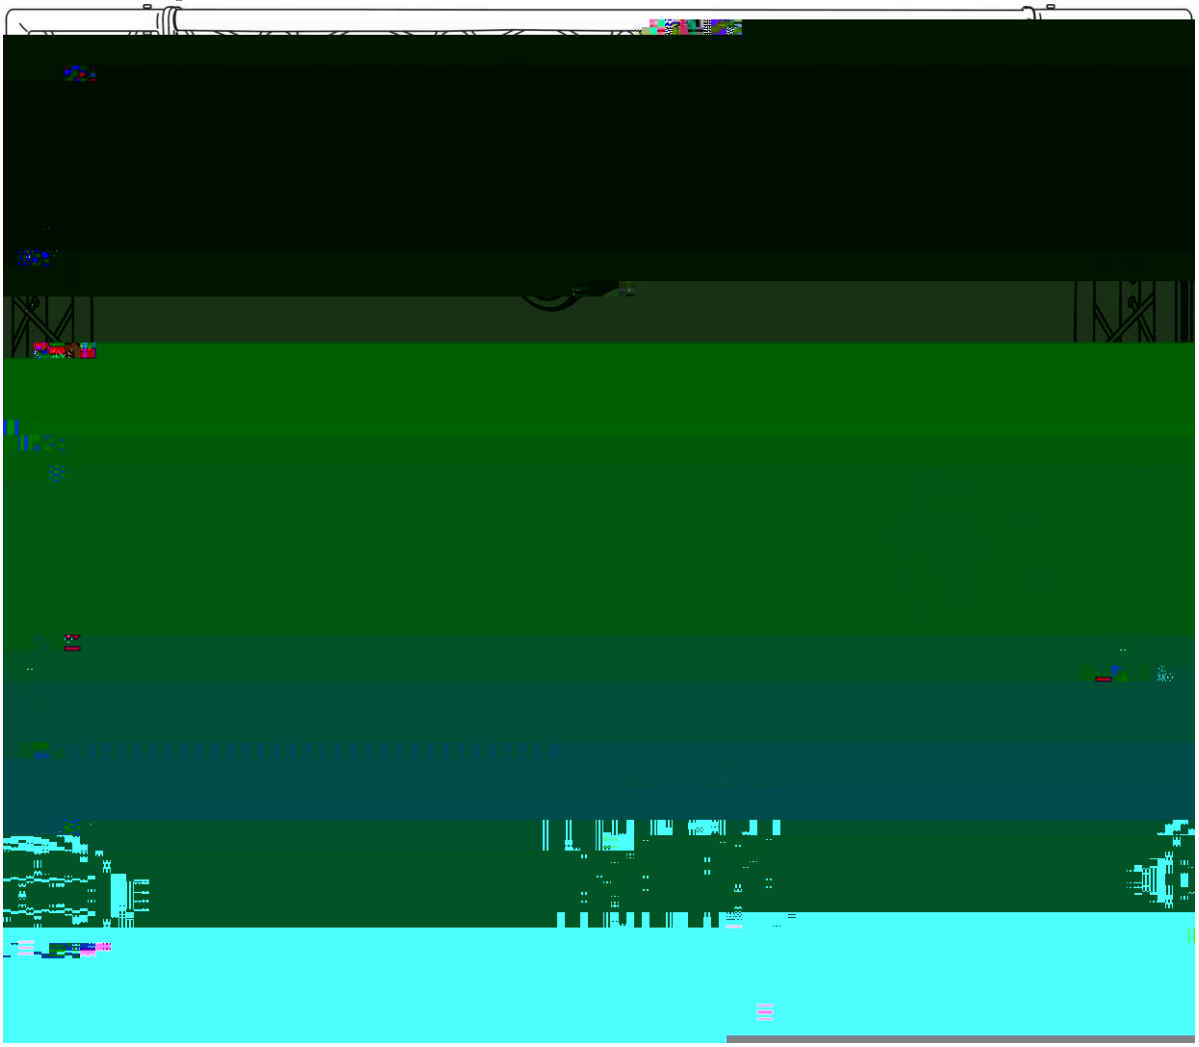

-
- 0.1
-

5.4 .


ضم غ . ٧ ضي ضي


1 . ٨ 4 M4x8 تم يح

2 نه ضم 4 M4x10 يح

3 . . يح h ضم ٧

4 ضم M3x6 تم نه

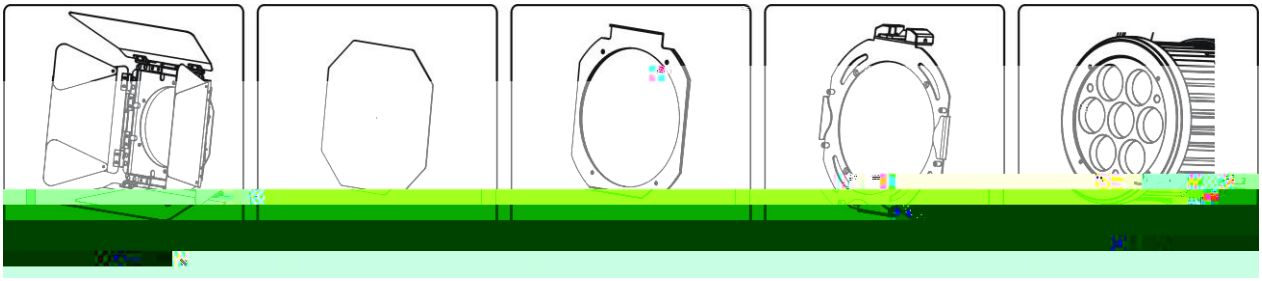

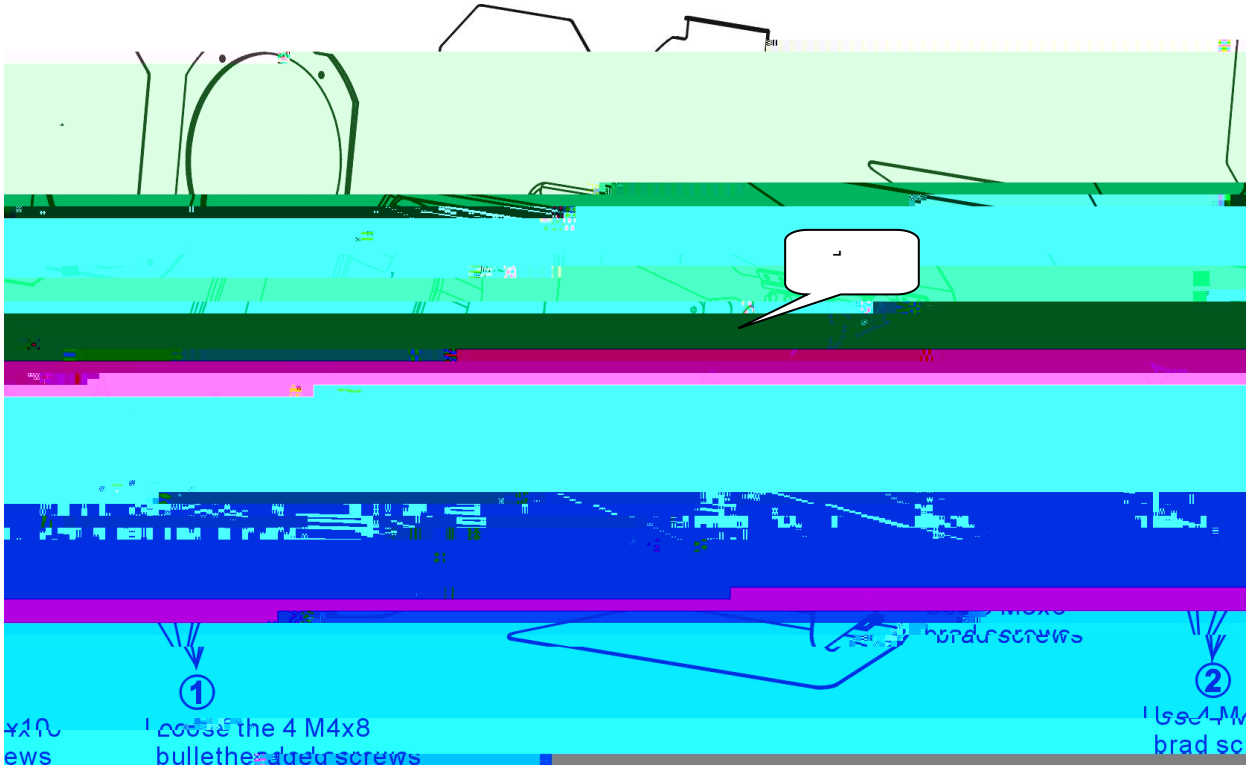


6. DMX-512


٧ DMX o ٧ o

o o

DMX ٧ ٧ ضي 32

يح

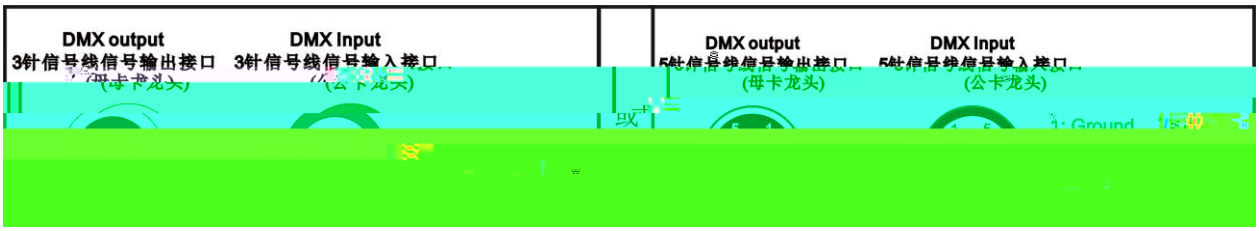

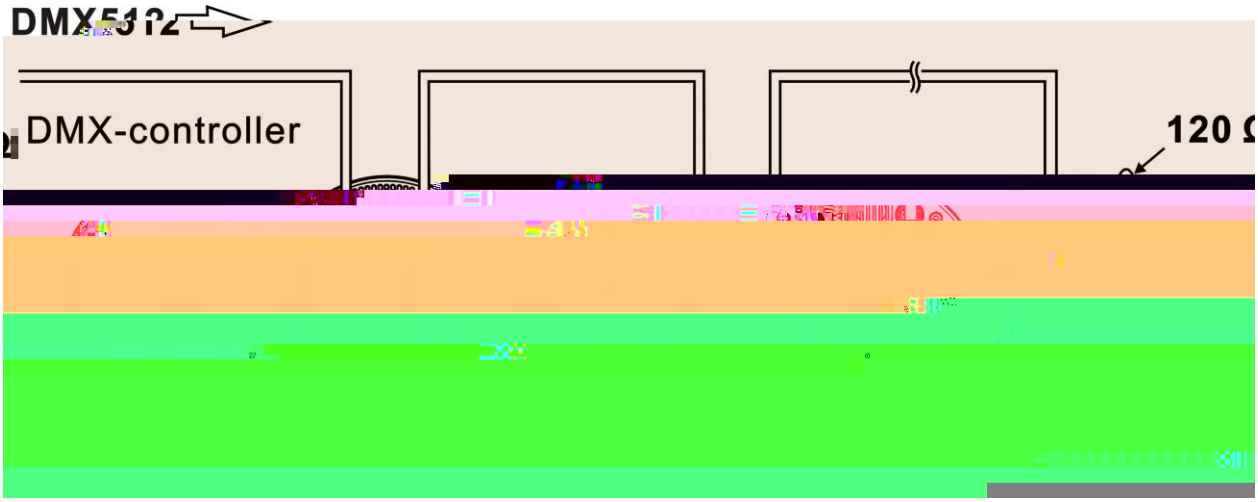


خي ضر 1 خي ضر 7 خي ضر 13

ا AC 100-120V~ ~ 2 3
~ ا AC 200-240V~ ~ 4 5

7. DMX كح

ضي ضي DMX512 ~ أ
DMX512 ~ كح ضي ا U ~ XLR ~ ٥ ضي2 3
120 0.25 ا يح

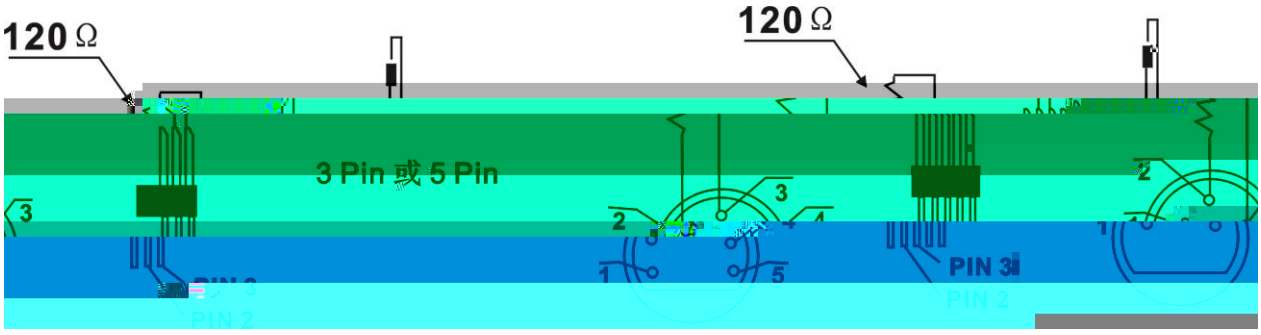

ضي ا 2 3 120 ∫ U ~ ~ ٥
DMX كح ضي ٧ ا

8. DMX خي ضر

~ خي ضر أ ~ خي ضر
أ DMX512 ~ L ~

DMX

DMX512

6 1 7 6+1

13 6+7

9.

4

[/] U 60

[h] 60

[h] 60

[ ]

1)

FuncMode	Address ValuDisp SetSlave AutoProg	A001~AXXX Auto…Red…. Slave1,Slave2,Slave3 Master / Alone		
Mode Set	UserMode	5CH 8CH 16CH 21CH		
Fastcolo	Red Green ……..			
Persnal	Stat Set	Addr DMX NoDMXSta	ON/OFF CloShut/**Hold**/Auto	DMX
	Serv Set	Password RDM PID		RDM
	FansCtrl	Auto Full Theatre		▲

	Disp Set	Off Time		
		Key Lock	ON/OFF	
	Temp C/F	Cels Fahren		
	InitStart	Auto :		

Refresh

4. <Up/Down> ˜ ضرخي A001~AXXX
5. <ENTER> <MODE/ESC>

9.1.2 ValuDisp —— ٻڀ

1. <MODE/ESC>
2. <Up/Down] ⌡ “ ValuDisp ”
3. <ENTER> “ ValuDisp ” ١
4. [Up/Down] ˜ ٻڀ
5. <ENTER> <MODE/ESC>

9.1.3 SetSlave —— ـ

1. <MODE/ESC>
2. <Up/Down> ⌡

NoDMXSta —— **DMX**

1. <MODE/ESC> <Up/Down> “ Persnal ”
   <ENTER> “ Persnal ” <Up/Down> “ Stat Set ”
   <ENTER> “ Stat Set ”
2. <Up/Down> “ NoDMXSta ”
3. <ENTER> “ NoDMXSta ”
4. “ Hold ” <Up/Down> “ CloShut “ Hold ” “ Auto ”
5. <ENTER> <MODE/ESC>

9.4.2 Serv set

Password —— **“ 050 ” .**

RDM PID —— RDM

RDM RDM
DMX-bus -ESTA ANSI
E1.20-2006 RDM DMX512 DMX
RDM
RDM DMX DMX RDM
DMX512 DMX DMX RDM
DMX RDM
RDM

9.4.3 Fans Ctrl ——

1. <MODE/ESC> <Up/Down> “ Persna ”
   <ENTER> “ Persna ”
2. <Up/Down> “ FansCtrl ”
3. <ENTER> “ FansCtrl ”
4. “ Auto ” <Up/Down> , “ Full ” “ Theatre ”
5. <ENTER> <MODE/ESC>

9.4.4 Disp Set

Off Time ——

5
1. <MODE/ESC> <Up/Down> “ Persna ”
   <ENTER> “ Persna ” <Up/Down> “ Disp Set ”
   <ENTER> “ Disp Set ”
2. <Up/Down> “ Off Time ”
3. <ENTER> “ Off Time ”
4. <ENTER> <Mode/Esc>

<ENTER> “ Persna ” ↰
2. <Up/Down> ⎧ “ Temp C/F ”
3. <ENTER> “ Temp C/F ” ↰
4. “ Cels ” <Up/Down> “ Fahren ”
5. <ENTER> <MODE/ESC>

9.4.6 InitStart ——

1. <MODE/ESC> <Up/Down> ⎧ “ Persna ”
<ENTER> “ Persna ” ↰
2. <Up/Down> ⎧ “ InitStart ”
3. <ENTER> “ InitStart ” ↰
4. “ Auto ”
5. <ENTER> <MODE/ESC>

9.4.7 Refresh —— ┘

1. <MODE/ESC> <Up/Down> ⎧ “ Persna ”
<ENTER> “ Persna ” ↰
2. <Up/Down> ⎧ “ Refresh ”
3. <ENTER> “ Refresh ” ↰
4. “ 900-1500 3000 6000 12000 24000 ”
5. <ENTER> <MODE/ESC>

9.4.8 Gamma

2.

TimePass ——

1. <MODE/ESC> <Up/Down> ⌠ “ Info ”
   <ENTER> “ Info ” ↵ <Up/Down> ⌠ “ Timeinfo ”
   <ENTER> “ Timeinfo ” ↵
2. <Up/Down> ⌠ “ TimePass ”
3. <ENTER> “ TimePass ” ↵ U 038
4. <ENTER> <MODE/ESC>

Clr Last ——

1. <MODE/ESC> <Up/Down> ⌠ “ Info ”
   <ENTER> “ Info ” ↵ <Up/Down> ⌠ “ Timeinfo ”
   <ENTER> “ Timeinfo ” ↵
2. <Up/Down> ⌠ “ Clr Last ”
3. ضي “ TimePass ” ↵ U <ENTER> “ Clr Last ” ↵
4. “ OFF ” <Up/Down> “ ON ”
5. <ENTER> <MODE/ESC>

9.8.2 TempInfo

HeadTemp —— ضي

1. <MODE/ESC> <Up/Down> ⌠ “ Info ”
   <ENTER> “ Info ” ↵ <Up/Down>

10.

DMX channel´s functions and their values (21 DMX channels):						
Mode/Channel				Value	Function	
5CH	8CH	16CH	21CH			
1	1				**Red LED -all arrays :**	
				0-255	Red (0-Black , 255-100% Red)	LED 0 100
2	2				**Green LED-all arrays :**	
				0-255	Green (0-Black , 255-100% Green)	LED 0 100
3	3					

				40-71	from YELLOW to GREEN	⌠
				72-103	from GREEN to CYAN	⌠
				104-135	from CYAN to BLUE	⌠
				136-167	from BLUE to MAGENTA	⌠
				168-199	from MAGENTA to RED	⌠
				200-231	from RED to WHITE	⌠
				232-255	Color Rainbow from slow to fast	⌠
					LEE Colors:	

0--

10

					193--199	Lime Green	Lime Green
					200--206	Spring Yellow	Spring Yellow
					207--213	Deep Amber	Deep Amber
					214--220	Chrome Orange	Chrome Orange
					221--227	Orange	Orange
					228--234	Gold Amber	Gold Amber
					235--241	Millennium Gold	Millennium Gold
					242--248	Deep Golden Amber	Deep Golden Amber
					249--255	Flame Red	Flame Red
						POLY Color1:	
					0--27	No function	w
					28--31	Pink #12	Pink #12
					32--35	Pink#140	Pink#140
					36--39	Pink#15	Pink#15
					40--43	Pink #16	Pink #16
					44--47	Pink#17	Pink#17
					48--51	Pink#170	Pink#170
					52--55	Pink#18	Pink#18
					56--59	Red#20	Red#20
					60--63	Red#21	Red#21
					64--67	Red#22	Red#22
			10	11	68--71	Red#24	Red#24
					72--75	Red#26	Red#26

116--119	Yell#44	Yell#44
120--123	Yell#45	Yell#45
124--127	Yell#46	Yell#46
128--131	Gree#52	Gree#52
132--135	Gree#53	Gree#53
136--139	Gree#54	Gree#54

				248--251	Perp#878	Perp#878
				252--255	Perp#88	Perp#88
		11	12		**POLY Color1 Dimmer:**	
				0-255	Intensity 100% to 0%	100% ⎧ 0%
		12	13		**POLY Color1 Fade:**	
				0-255	POLY Color1 Fade	Ĩ
			14		**Color Presets:**	
				0-10	No function	
				11--20	White2300k/A5	2300K
				21--30	White2500k/A4	2500K
				31-40	White2600k/A3	2600K
				41-50	White2900k/A2	2900K
				51-60	White3000k/A1	3000K
				61-70	White3050k/TV White	3050K
				71-80	White3200k/A0	3200K
				81-90	White3400k/B1	3400K
				91-100	White3600k/B2	3600K
				101-110	White4000k/B3	4000K

				21-40	Auto	ـ
				41-60	Full	
				61-80	Theatre	▲
				81-255	Reserve	
			19		**Color Mode:**	
				0-189	No function	
				190-254	Edit a new white balance	
				255	Store a new white balance	
5	7	15	20		**Zoom :**	
				0-255	Zoom adjustment	
					Reset, internal programs:	
				0-79	Normal	
				80-84	All reset	
				85-87	no function	
				88-90	no function	
				91-93	Store white balance enabled	
				94-96	no function	
				97-99	no function	
	8	16	21	100-119	Internal program 1 (secne1~8 of EEPROM)	1 (كج 1~8 شي)
				120-139	Internal program 2 (secne9~16 of EEPROM)	2(كج 9~16 شي)
				140-159	Internal program 3 (secne17~24 of EEPROM)	3(كج 17~24 شي)

11.

1
2
3
4




公司网址：www.terbly.com 邮编：511450
售后服务网址：CAC@terbly.com